

FORM PTO-1390  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

MAT-8124US

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/807706

INTERNATIONAL APPLICATION NO.  
PCT/JP00/05490INTERNATIONAL FILING DATE  
17 August 2000 (17.08.00)PRIORITY DATE CLAIMED  
20 August 1999 (20.08.99)TITLE OF INVENTION  
ACTIVE NOISE CONTROL SYSTEMAPPLICANT(S) FOR DO/EO/US  
Toshihiko OHASHI

Applicant herewith submits to the united States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (UNEXECUTED).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 20 below concern documents(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 U.S.C. 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 – 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

U.S. APPLICATION NO (if known, see 37 CFR 1.5) <b>807706</b>	INTERNATIONAL APPLICATION NO. PCT/JP00/05490	ATTORNEY DOCKET NUMBER MAT-8124US
-----------------------------------------------------------------	-------------------------------------------------	--------------------------------------

**21.** ☒ The following fees are submitted:  
**BASIC NATIONAL FEE (37 CFR 1.492(a)(1) - (5)):**  
☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1000.00  
☒ International preliminary examination fee (37 CFR 1.482)not paid to USPTO but International Search Report prepared by the EPO or JPO..... \$860.00  
☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00  
☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00  
☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	<b>\$</b>	
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	--

CLAIMS	NUMBER FILED	EXTRA NUMBER	RATE
Total claims	14- 20 =	0	X \$18.00
Independent claims	1 - 3 =	0	X \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)	<input type="checkbox"/>		+ \$270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>			<b>\$ 860.00</b>
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by ½.			\$
<b>SUBTOTAL =</b>			<b>\$ 860.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 Months from the earliest claimed priority date (37 CFR 1.492(f)).			\$ +
<b>TOTAL NATIONAL FEE =</b>			<b>\$ 860.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property			\$ +
<b>TOTAL FEES ENCLOSED =</b>			<b>\$ 860.00</b>
			<b>Amount to be refunded:</b> \$
			<b>Charged:</b> \$

a. ☒ A check in the amount of **\$860** to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **18-0350**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:  
Lawrence E. Ashery  
Ratner & Prestia  
P.O. Box 980  
Valley Forge, PA 19482  
(610) 407-0700

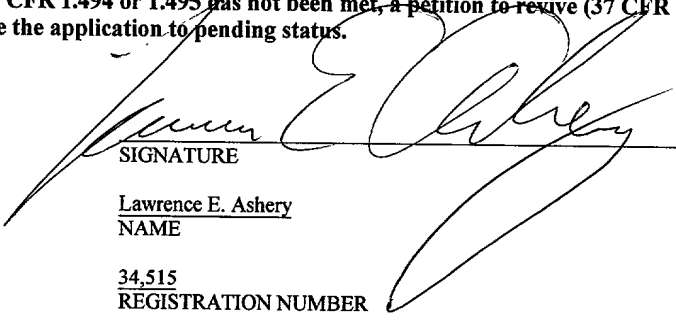  
\_\_\_\_\_  
SIGNATURE  
Lawrence E. Ashery  
NAME  
34,515  
REGISTRATION NUMBER  
April 17, 2001  
DATE

MAT-8124US

PATENT

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: T. Ohashi : Art Unit:  
Serial No.: To Be Assigned : Examiner:  
Filed: Herewith :  
FOR: ACTIVE NOISE CONTROL SYSTEM :

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

S I R :

Prior to examination, please amend the above application as follows:

IN THE SPECIFICATION:

After the title and before the first paragraph, please insert the following paragraph:

THIS APPLICATION IS A U.S. NATIONAL PHASE  
APPLICATION OF PCT INTERNATIONAL APPLICATION  
PCT/JP00/05490.


IN THE DRAWINGS:

Please delete pages "10/11" and "11/11" of the drawings, also labeled as "Reference numerals in the drawings" in their entireties.

ABSTRACT:

Please replace the abstract with the new abstract which is attached as a separate sheet.

Respectfully submitted,

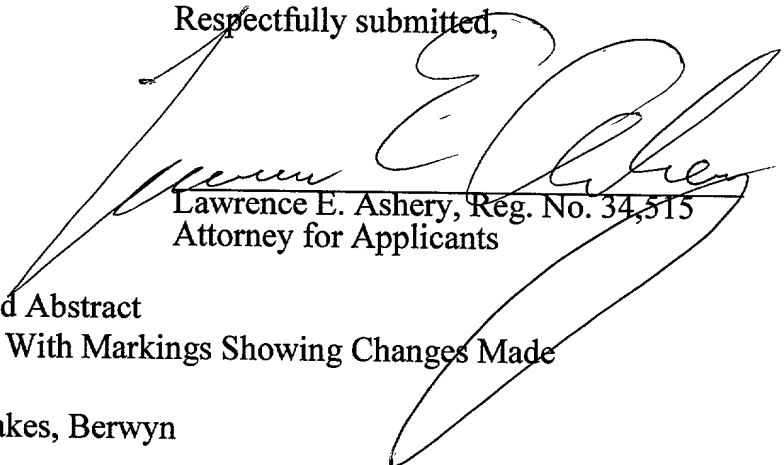  
Lawrence E. Ashery, Reg. No. 34,515  
Attorney for Applicants

LEA/dlm


Enclosures: Amended Abstract  
Version With Markings Showing Changes Made

Suite 301, One Westlakes, Berwyn  
P.O. Box 980  
Valley Forge, PA 19482-0980  
(610) 407-0700

The Assistant Commissioner for Patents is hereby  
authorized to charge payment to Deposit Account  
No. 18-0350 of any fees associated with this  
communication.

**EXPRESS MAIL** Mailing Label Number: EL 835671136 US  
Date of Deposit: April 17, 2001

I hereby certify that this paper and fee are being deposited, under 37 C.F.R. § 1.10 and with sufficient postage, using the "Express Mail Post Office to Addressee" service of the United States Postal Service on the date indicated above and that the deposit is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

  
Kathleen Libby

## ABSTRACT

An active noise control system includes a source unit for generating regenerative signals, an ANC unit for processing signals so as to actively cancel noise, sensors for detecting the information on the inside and outside of a vehicle, a vehicle interior voice discriminating unit for discriminating voice of conversation generated in the vehicle interior, an amplifier for amplifying the signals processed by ANC unit and reproducing transducers for reproducing the signals amplified by the amplifier.

VERSION WITH MARKINGS SHOWING CHANGES MADE

IN THE SPECIFICATION:

After the title and before the first paragraph:

THIS APPLICATION IS A U.S. NATIONAL PHASE  
APPLICATION OF PCT INTERNATIONAL APPLICATION PCT/JP00/05490.

ABSTRACT:

~~The present invention aims to provide an~~ An active noise control system ~~for reducing noises extending to medium- and high- frequency bands in the interior of a vehicle. To accomplish this purpose, the system has~~ includes a source unit (1) for generating regenerative signals, an ANC unit (2) for processing signals so as to actively cancel noise, sensors (6) for detecting the information on the inside and outside of a vehicle, a vehicle interior voice discriminating unit (5) for discriminating voice of conversation generated in the vehicle interior, an amplifier (3) for amplifying the signals processed by ANC unit (2) and reproducing transducers (4) for reproducing the signals amplified by ~~this the~~ the amplifier (3).

11/PR

09/807706

1

JC03 Rec'd PCT/PTO 17 APR 2001

P23542

## DESCRIPTION

### 5 ACTIVE NOISE CONTROL SYSTEM

The present invention relates to a system for reducing noise in the interior of a vehicle such as a car.

### FIELD OF THE INVENTION

10 In recent years, improvement in hardware performance, cost reduction, and the like are putting active noise control techniques into practical use. In particular, their effectiveness has been validated in noises in a low-frequency band that are difficult to be reduced by conventional passive measures. Such active techniques are mainly  
15 applied to the low-frequency band.

However, as for the application to noises in medium- and high-frequency bands, the application of such techniques to a noise elimination system for a vehicle interior was not easy because of the following two reasons: the long distances from the controlled sound  
20 sources to the hearing points tend to generate error and make control more difficult; and the acoustic space to be controlled is three-dimensional and thus has a plurality of hearing points. Moreover, extending frequency bands to be controlled to medium- and high-frequency bands posed a problem that even the conversation of  
25 passengers was eliminated because it was also a disturbance for the reproducing system.

## DISCLOSURE OF THE INVENTION

It is an object of the present invention to correct these conventional defects and to provide a noise control system for reducing noises extending to medium- and high-frequency bands in the interior of a vehicle.

In order to address these problems, the active noise control system of the present invention comprises; a source unit for generating regenerative signals, an active noise control (ANC) unit for processing signals so as to actively cancel noise, sensors for detecting the information on the inside and outside of a vehicle; a vehicle interior voice discriminating unit for discriminating voices emanated in the vehicle interior, an amplifier for amplifying the signals processed by the ANC unit, and reproducing transducers for reproducing the signals amplified by the amplifier.

This structure allows reduction of noises extending to medium- and high-frequency bands in the interior of a vehicle.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram for illustrating an exemplary embodiment of an active noise control system in accordance with the present invention;

Fig. 2 is a block diagram for illustrating the basic operating principle of an ANC unit of the system;

Fig. 3 is a block diagram for illustrating the noise eliminating operation of the system;

Fig. 4 is a block diagram for illustrating a detailed example of the ANC unit of the system;

Fig. 5 is a block diagram for illustrating another example of the



ANC unit of the system;

Fig. 6 is a block diagram for illustrating a vehicle interior voice discriminating unit of the system;

Fig. 7 is a layout diagram for illustrating an arrangement  
5 example of some of the sensors in the system;

Fig. 8 is a layout diagram for illustrating an arrangement example of seat microphones of the system;

Fig. 9A is a transition diagram showing the formant frequencies of a phoneme varying with time in the vehicle interior voice  
10 discriminating unit of the system;

Fig. 9B is a schematic diagram for illustrating formant characteristics of the vowels in the vehicle interior voice discriminating unit of the system;

Fig. 10 is a graph for illustrating a long-term power spectrum  
15 effective value of the voices in the vehicle interior voice discriminating unit of the system;

Fig. 11 is a layout diagram for illustrating an arrangement example of speakers of the system;

Fig. 12 is a layout diagram for illustrating an arrangement  
20 example of bone-conduction actuators of the system; and

Fig. 13 is a block diagram for illustrating the operation of a fail-safe function of the system.

## PREFERRED EMBODIMENT OF THE INVENTION

### 25 Exemplary Embodiment

An exemplary embodiment of the present invention is hereinafter demonstrated with reference to Figs. 1 through 13.

Fig. 1 is a block diagram illustrating an exemplary embodiment

of an active noise control system in accordance with the present invention. Signals emanating from source unit 1, such as a radio and compact disc (CD) are fed into ANC unit 2. The output of ANC unit 2 is fed into amplifier 3. The output of amplifier 3 is connected to reproducing transducer 4. The output of sensor 6 is fed into vehicle interior voice discriminating unit 5 and ANC unit 2, and the output of vehicle interior voice discriminating unit 5 is fed into ANC unit 2. The output of amplifier 3 is also fed into ANC unit 2.

In such a structure, its operation is described below.

Regenerative signals from source unit 1 are fed into ANC unit 2, where the signals are mixed with noise eliminating signals generated in the ANC unit, amplified by amplifier 3, and fed into such reproducing transducers 4 as speakers, so that the signals from source unit 1 are reproduced while noise is eliminated.

On the other hand, noise signals and various kinds of vehicle information signals transmitted from sensors 6 are fed into vehicle interior voice discriminating unit 5 and ANC unit 2. Such sensors include those comprising microphones for detecting information on the inside and outside of the vehicle and those for detecting the presence of passengers. Vehicle interior voice discriminating unit 5 discriminates the voices of passengers using the signals from sensors 6 and transmits ANC control signals to ANC unit 2 for switching ON/OFF the noise eliminating operation. ANC unit 2 generates noise elimination signals using the signals from sensors 6 and the output signals from amplifier 3, and the regenerative signals from source unit 1 and the noise elimination signals are mixed with the ANC control signals so as to form reproduced signals.

Fig.2 is a block diagram showing the basic structure of ANC unit

2. Noise reference signals  $x(n)$  that are obtained from some of sensors 6 are fed into filter 7 and adaptive algorithm unit 8. Output signals  $y(n)$  from filter 7 are subtracted from noise signals  $d(n)$  to be eliminated. The noise signals are also obtained from some of sensors 6. Resultant error signals  $e(n)$  are fed into adaptive algorithm unit 8.

Next, the noise elimination operation in ANC unit 2 is described. Noise reference signals  $x(n)$  are fed into filter 7 and output signals  $y(n)$  are supplied. Output signals  $y(n)$  are subtracted from noise signals  $d(n)$  and resultant error signals  $e(n)$  are obtained. Factors of filter 7 are sequentially updated by application of an adaptive algorithm, typified by the least-mean-square (LMS) algorithm, to these error signals  $e(n)$  and noise reference signals  $x(n)$  in adaptive algorithm unit 8. This operation minimizes error signals  $e(n)$  and consequently allows elimination of noise signals  $d(n)$ .

Fig. 3 is a block diagram for illustrating a specific noise elimination operation in the active noise control system shown in Fig. 1

In Fig. 3, the same components as shown in Figs. 1 and 2 are denoted with the same reference numerals. Detailed explanation of the same components is omitted and only the different components are detailed.

Signals transmitted from reference microphone 31 are fed into filters 7 and 38. The output of filter 7 is mixed with the signals from source unit 1 and supplied to speakers 32 as reproducing transducers 4 as well as delay unit 35. The output of delay unit 35 is fed into echo-canceling filter 34 and the output of the filter is subtracted from the signals from reference microphone 31. The output signals from filter 38 and error microphone 33 are fed into adaptive algorithm unit 8. The output of adaptive algorithm unit 8 is fed into filter 7.

Since output signals  $y(n)$  shown Fig. 2 undergo influence of a transfer function until they reach hearing points, filter 38 must be added to compensate such influence. Providing the filter compensates the influence the transfer function exerts on the sound transmitted from speaker 32 to error microphone 33.

Moreover, echo-canceling filter 34 is added in order to prevent the reproduced sound itself from being fed into as noise reference signals  $x(n)$ . Delay unit 35 is provided to delay signals through echo-canceling filter 34 so that the signals coincide with the sound transmitted through the acoustic space because the signals through echo-canceling filter are transmitted via the electrical path. As a result, the sound fed from speaker 32 into reference microphone 31 is canceled out by the output of echo-canceling filter 34. Filter 38 and echo-canceling filter 34 are determined by system identification prior to the actual operation.

The signals from source unit 1 does not go through filter 7 and are added before reproduced output and thus do not undergo the filtering process for noise elimination. In addition, since echo-canceling filter 34 is effective, the signals from source unit 1 are not inversely affected and thus reproduced as they are together with noise elimination signals.

Fig. 4 is a block diagram for illustrating a detailed example of ANC unit 2 as shown in Fig. 2.

The output signals from reference microphone 31, a kind of noise reference signals  $x(n)$ , are connected to filters 41 and 42. The output of filter 41 is fed into adaptive filter 43 and the output of adaptive filter 43 is fed into mixer 46.

The output of filter 42 is connected to switching unit 45 and

adaptive filter 44. The output of filter 44 is fed into switching unit 45 and the output of switching unit 45 is fed into mixer 46.

Filter 41 allows the signals outside of the voice band to go through. The signals outside of the voice band that have passed through filter 41 go into adaptive filter 43, where the noise outside of the voice band are adapted for elimination. Filter 42 allows signals within the voice band to go through. Signals that have passed through filter 42 go into adaptive filter 44, where the signals within the voice band are adapted for elimination. Responsive to the output signals from vehicle interior voice discriminating unit 5, switching unit 45 switches so as to select either the signals from filter 42 without adaptation or adapted signals. Then the selected signals are mixed in mixer 46 for output. As described above, when voice emanates in the vehicle interior, all the signals from filter 42 are used without adaptation; thus sound within the voice band, i.e. conversation, is not eliminated. Noise outside of the voice band, however, is eliminated.

The factors of adaptive filters 43 and 44 can be set arbitrarily by switching. They can be continuously updated or fixed.

Fig. 5 is a block diagram for illustrating another example of ANC unit 2 shown in Fig. 2.

In Fig.5, the same components as shown in Figs. 2 and 4 are denoted with the same reference numerals. Detailed explanation of the same components is omitted and only the different components are detailed.

In Fig. 5, the signals from reference microphone 31 are fed into filter block 54. In block 54, the signals are fed into filter 41 and switching unit 45. The output of filter 41 is fed into switching unit 45.

The input signals (the output signals of reference microphone 31)

are fed into filter 41 that allows the signals outside of the voice band to go through. Responsive to the output signals from vehicle interior voice discriminating unit 5, switching unit 45 switches so as to select either allowing passage of all the signals without filtration or filtering out using filter 41. Thus, this ANC unit stops the noise eliminating operation on the signals within the voice band (i.e. conversation) when voice has emanated in the vehicle interior.

Fig. 6 is a block diagram for illustrating vehicle interior voice discriminating unit 5.

Signals from seat microphones 61, some of sensors 6, are fed into voice band filter 63. The output of filter 63 is fed into time-difference information unit 68 and passenger-location information unit 69 in voice-location estimating unit 65 and also fed into spectrum characteristics unit 70 and envelope characteristics unit 71 in voice-likelihood estimating unit 66. The output of filter 63 is also fed into noise correlating unit 67. The output of noise reference signal sensors 62 is fed into voice band filter 64. The output of voice band filter 64 is fed into noise correlating unit 67. The outputs of voice-location estimating unit 65, voice-likelihood estimating unit 66, and noise correlating unit 67 are fed into weighting unit 72, and the output of weighting unit 72 is fed into determining unit 73.

Fig. 6 is an example showing the structure of vehicle interior voice discriminating unit 5. The signals from seat microphones 61 provided in the proximity of the passengers are restricted to those within the voice band by voice band filter 63, and then the restricted signals are fed into voice-location estimating unit 65, voice-likelihood estimating unit 66, and noise correlating unit 67. The signals from noise reference signal sensors 62 are restricted to those within the voice

band by voice band filter 64, and then the restricted signals are fed into noise correlating unit 67. Voice-location estimating unit 65 comprises time-difference information unit 68, passenger-location information unit 69, and other components. Voice-likelihood estimating unit 66  
 5 comprises spectrum characteristics unit 70, envelope characteristics unit 71, and other components. The output from each of these components is fed into weighting unit 72. Noise correlating unit 67 examines the correlation between the signals from seat microphones 61 that have passed through filter 63 and the signals from noise reference  
 10 signal sensors 62 that have passed through voice band filter 64, and supplies the degree of correlation to weighting unit 72. Weighting unit 72 assigns weights to each input signal and supplies the sum of the weighted input to determining unit 73. The determining unit 73 supplies control signals according to preset threshold values.

15 Time-difference information unit 68 utilizes the order in which signals from seat microphones 61 emanate. Passenger-location information unit 69 utilizes the volume of the signals from seat microphones 61 and passenger-detecting sensors 78 (detailed in Fig. 7).

Fig. 7 is a layout diagram for illustrating an arrangement  
 20 example of some of sensors 6.

Provided in a bonnet are engine sound sensor 74 and engine speed sensor 75. Provided in a vehicle interior are interior sound sensors 77 on the ceiling and passenger-detecting sensors 78 under the seats. In addition, outside sound sensor 76 is provided from the  
 25 ceiling to the outside and road surface sound sensor 79 is provided in the proximity to the tire house.

Fig. 8 is a layout diagram for illustrating an arrangement example of seat microphones 61.

The front seat right headrest is provided with front seat right microphone 81 and the front seat left headrest is provided with front seat left microphone 82. Similarly, the backseats are provided with backseat right microphone 83 and backseat left microphone 84. The point equidistant from the head position of each seat is shown by center position 85.

Vocal signals generated by a driver reach each of seat microphones 81 through 84 at different time. On the other hand, if the vocal signals emanate from central position 85 of the vehicle, they reach each microphone at the same time. Therefore, measuring the time difference among the signals emanating from each of seat microphones 81 through 84 allows estimation of the position at which voice has emanated. The estimation can be more accurate when the information from passenger-detecting sensors 78 is taken into account.

These concepts are used for time-difference information unit 68 and passenger-location information unit 69 shown in Fig. 6.

Sensors 6 include various types that are capable of detecting sounds and vibrations outside of the running vehicle, information on factors affecting the vehicle interior acoustic space, and such operating conditions as running speeds of the vehicle, other than the sensors described above.

The use of the information described in Figs. 6 through 8 improves the accuracy in discrimination of the voice.

Fig. 9A is a transition diagram showing formant frequencies of a phoneme varying with time in vehicle voice discriminating unit 5 and Fig. 9B is a schematic drawing for illustrating the characteristics of the formants of the vowels.

Fig. 9A shows a typical pattern of a phoneme, indicating that a



formant becomes stable after going through its consonant and transient parts and reaches its vowel part. Fig. 9B shows the formants of vowel parts. It is seen that each vowel has the first, second and third formants (F1, F2 and F3) different from each other. Therefore, such a pattern can be utilized for discrimination between noise and voice. In general, rotating sound of an engine and the like has a noise pattern that is an integral multiple. Such a sound as wind has a flat spectrum due to its random property and thus often has a pattern different from a voice pattern. If the noise patterns of the vehicle are understood in relation with its speed and engine speed, such known information can be also used for the discrimination.

Using these characteristics further improves the accuracy in discrimination of the voice.

Fig. 10 is a graph for illustrating a long-term power spectrum effective value of voices in vehicle interior voice discriminating unit 5. The solid line indicates a female voice and broken line indicates a male voice. Major power lies between 300 Hz and 1 kHz and the power considerably attenuates toward higher frequencies. Therefore, filters covering up to 2 to 3 kHz are sufficient. From the viewpoint of phonetics, filters covering up to the second formant are almost effective. In addition, since noise is somewhat more persistent than voice, such information on signal envelopes can also be used for the discrimination. These characteristics are used for spectrum characteristics unit 70 and envelope characteristics unit 71.

Fig. 11 is a layout diagram for illustrating an arrangement example of speakers used as reproducing transducers 4.

While the doors carry door speakers 91 and the rear tray carries rear tray speakers 93, the headrests carry headrest speakers 92 close to

persons' ears.

Since headrest speakers 92 are closer to the ears, i.e. hearing points, than door speakers 91 and rear tray speakers 93, errors generated during the transmission of sound from speaker 32 to error microphone 33 as explained in Fig. 3 are reduced. This arrangement allows more accurate control and thus elimination of the noise extending to a higher voice-frequency band.

Fig. 12 is an arrangement diagram for illustrating an arrangement example of bone-conduction actuators as reproducing transducers 4.

The headrests carry bone-conduction actuators 94 close to the ears. Even for a voice frequency of 1 kHz, its half wave is about 15 cm, i.e. equivalent to the distance between both ears. Thus, for higher voice-frequency bands, speakers as the reproducing transducers are more difficult to be placed. Also from the viewpoints of the service area and interference with and by other speakers, bone-conduction actuators 94 are effective.

Fig. 13 is a block diagram for illustrating the operation of a fail-safe function in the active noise control system shown in Fig.1

In Fig. 13, the same components as shown in Figs. 1 and 3 are denoted with the same reference numerals. Detailed explanation of the same components is omitted and only the different components are detailed.

The signals from source unit 1 are fed into fail-safe unit 95 and ANC unit 2. The output of ANC unit 2 is fed into amplifier 3 and fail-safe unit 95, and the output of amplifier 3 is fed into speaker 32 and fail-safe unit 95. The output of fail-safe unit 95 is fed into ANC unit 2 and amplifier 3.

The fail-safe function is structured so that fail-safe unit 95 receives the output signals from source unit 1, the output signals from ANC unit 2, and the output signals from amplifier 3, as monitoring signals, and then processed control signals (the output signals from fail-safe unit 95) control ANC unit 2 and amplifier 3. Specifically, the function controls processing signals (the output from fail-safe unit 95) so as to reduce the signals or restrict noise elimination operation when the signals become too large and distorted and give such an ill effect as impairing the noise elimination effect. When music source signals are too large for us to recognize the noise elimination effect, the function also controls to restrict noise elimination operation so that the reproduction dynamic range is not inversely affected.

### INDUSTRIAL APPLICABILITY

As described above, the system of the present invention has: a source unit for generating regenerative signals; an ANC unit for processing signals so as to actively cancel noise; sensors for detecting the information on the inside and outside of a vehicle; a vehicle interior voice discriminating unit for discriminating voice of conversation generated in the vehicle interior; an amplifier for amplifying the signals processed by the ANC unit; and reproducing transducers for reproducing the signals amplified by this amplifier. This structure allows reduction of noises extending to medium- and high-frequency bands in the interior of a vehicle.

## CLAIMS

1. An active noise control (ANC) system comprising:  
a source unit for generating regenerative signals;  
an ANC unit for processing signals so as to actively cancel noise;  
5 sensors for detecting information on the inside and outside of a  
vehicle;

a vehicle interior voice discriminating unit for discriminating  
voice of conversation in the interior of the vehicle;

an amplifier for amplifying the signals processed by said ANC  
10 unit; and

a reproducing transducer for reproducing the signals amplified  
by said amplifier.

2. The active noise control system as described in Claim 1  
15 wherein said ANC unit is structured so as to change processing effect  
thereof on noise in a voice band according to control signals supplied  
from said vehicle interior voice discriminating unit.

3. The active noise control system as described in Claim 2  
20 wherein said ANC unit comprises:

a first filter for allowing the output signals outside of the voice  
band supplied from said sensors to go through;

a first adaptive filter for eliminating noises outside of the voice  
band from the output of said first filter;

25 a second filter for allowing the output signals within the voice  
band supplied from said sensors to go through;

a switching unit for switching operations so as to select one of  
allowing passage of all the output from said second filter without

filtration when voice is present in said vehicle interior and allowing the output from said second filter to pass through a second adaptive filter for eliminating noises within the voice band when no voice is present in said vehicle interior; and

5           a mixer for mixing the output from said first adaptive filter and the output from said switching unit.

4. The active noise control system as described in Claim 2 wherein said ANC unit comprises:

10           a filter for allowing the output signals outside of the voice band supplied from said sensors;

          a switching unit for switching so as to select one of allowing passage of all the output signals from said sensors without filtration when voice is present in said vehicle interior and allowing the output  
15           signals to pass through said filter when no voice is present in said vehicle interior.

5. The active noise control system as described in Claim 3 wherein factors of said first and second adaptive filters can be  
20           arbitrarily set by switching so as to be continuously updated and fixed.

6. The active noise control system as described in Claim 1 wherein said sensors include one of a type for detecting vehicle interior sounds, engine sound, and sounds and vibrations outside of the running  
25           vehicle, a type for detecting information on factors affecting the acoustic space of the vehicle such as the number of passengers and the location thereof and a type for detecting operating conditions of the vehicle such as engine speeds and running speeds thereof.

7. The active noise control system as described in Claim 6 wherein said sensors for detecting the location of passengers are arranged in predetermined positions and the number of sensors are  
5 such that generated voice can be located.

8. The active noise control system as described in Claim 7 wherein said sensors for detecting the location of passengers are microphones placed in the vicinity of the heads of passengers.  
10

9. The active noise control system as described in Claim 1 wherein said vehicle interior voice discriminating unit constructs a determining algorithm using one of relation among time at which signals are supplied from said sensors, information on passengers, correlation between the signals from said sensors and characteristics of  
15 frequency components and amplitudes of the signals from said sensors.

10. The active noise control system as described in Claim 1 wherein said reproducing transducer is a speaker.  
20

11. The active noise control system as described in Claim 10 wherein said system is structured so that a headrest carries the speaker.

25 12. The active noise control system as described in Claim 1 wherein said reproducing transducer is a bone-conduction actuator.

13. The active noise control system as described in Claim 3

wherein said ANC unit has a fail-safe unit for stopping noise reduction operation when the operation is ineffective.

14. The active noise control system as described in Claim 13  
5 wherein said fail-safe unit also operates when the signals from said source unit are in a higher level.

## ABSTRACT

The present invention aims to provide an active noise control system for reducing noises extending to medium- and high-frequency bands in the interior of a vehicle. To accomplish this purpose, the system has source unit (1) for generating regenerative signals, ANC unit (2) for processing signals so as to actively cancel noise, sensors (6) for detecting the information on the inside and outside of a vehicle, vehicle interior voice discriminating unit (5) for discriminating voice of conversation generated in the vehicle interior, amplifier (3) for amplifying the signals processed by ANC unit (2) and reproducing transducers (4) for reproducing the signals amplified by this amplifier (3).



FIG. 1

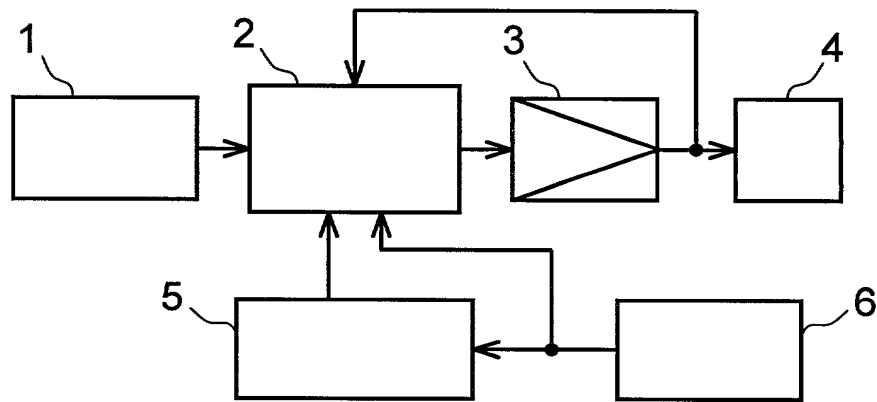


FIG. 2

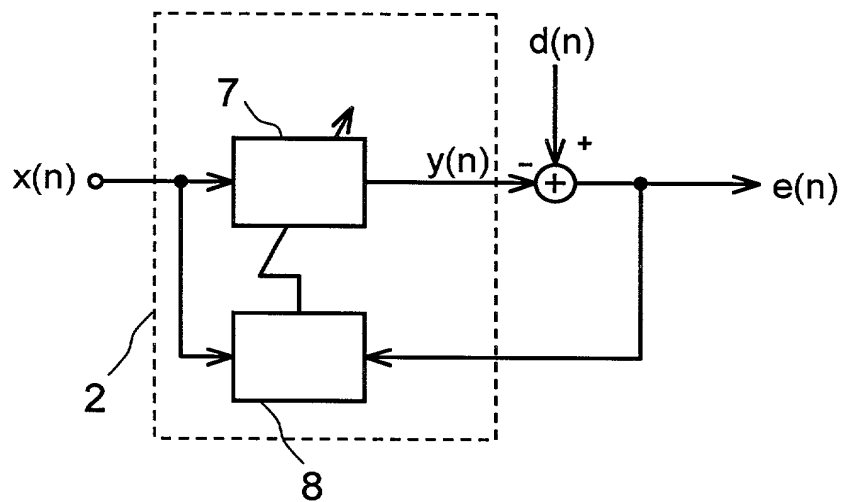


FIG. 3

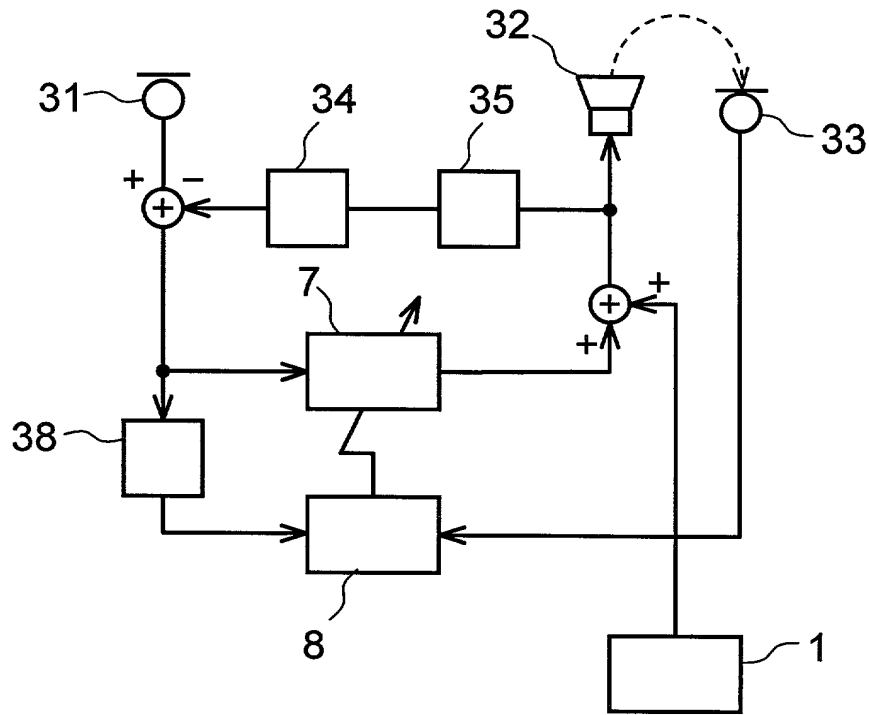


FIG. 4

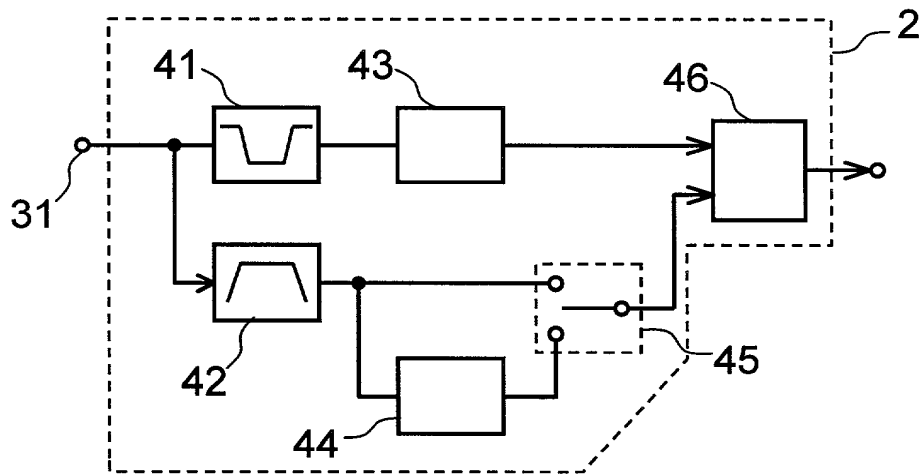


FIG. 5

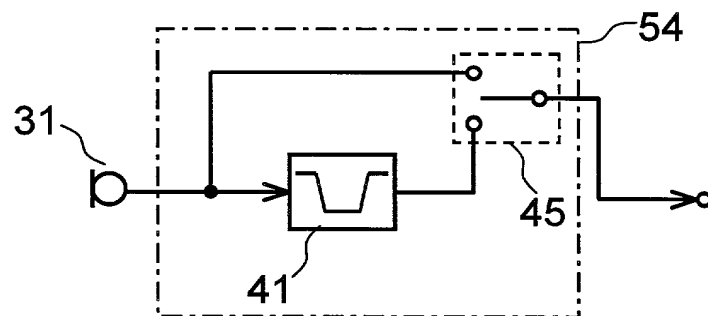


FIG. 6

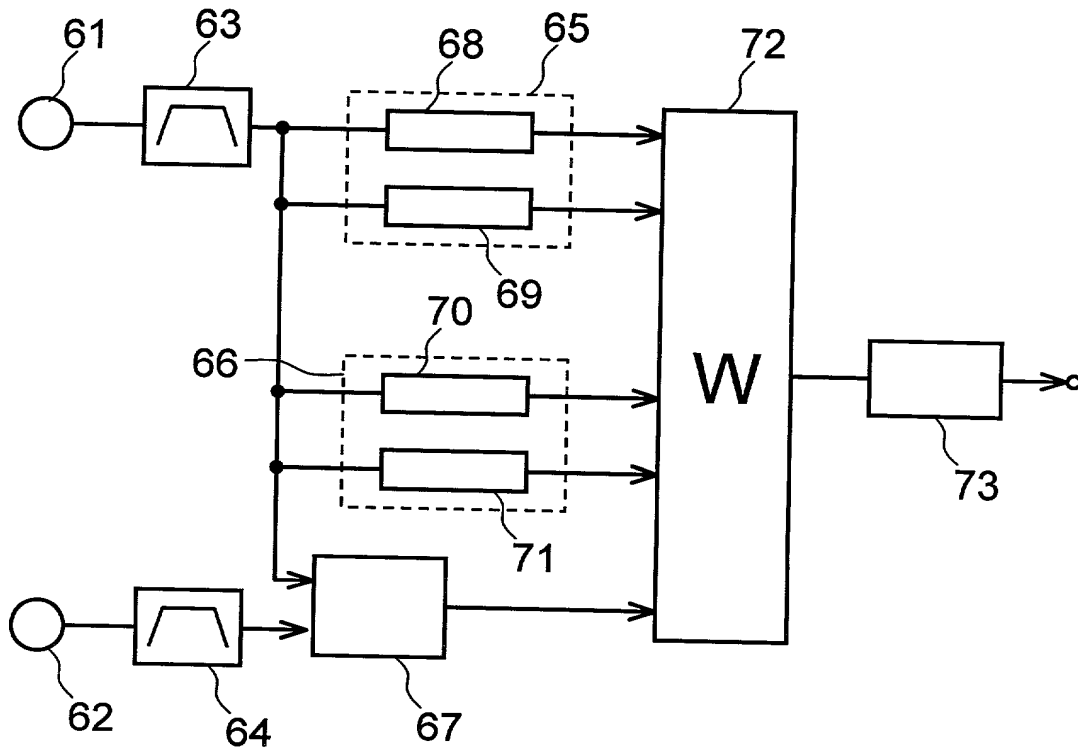


FIG. 7


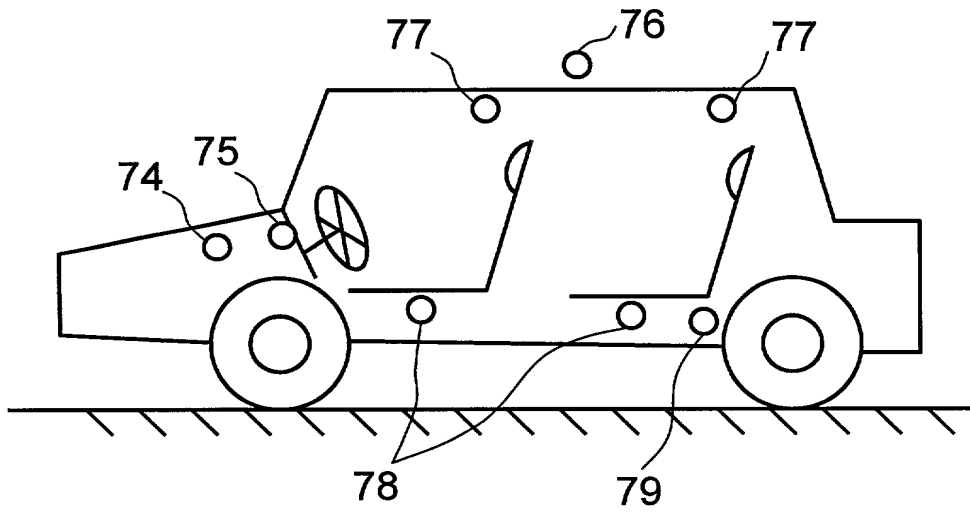


FIG. 8

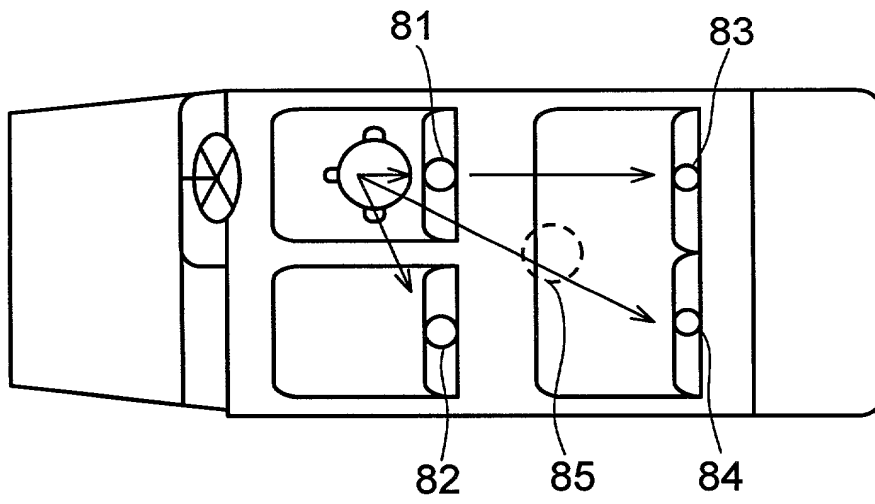

7/11

FIG. 9A

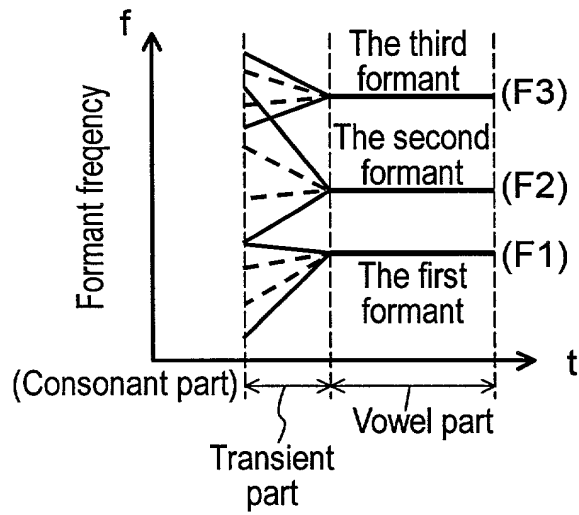


FIG. 9B

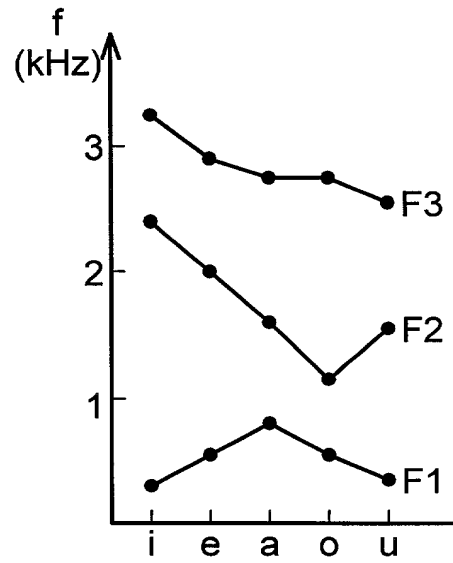


FIG. 10

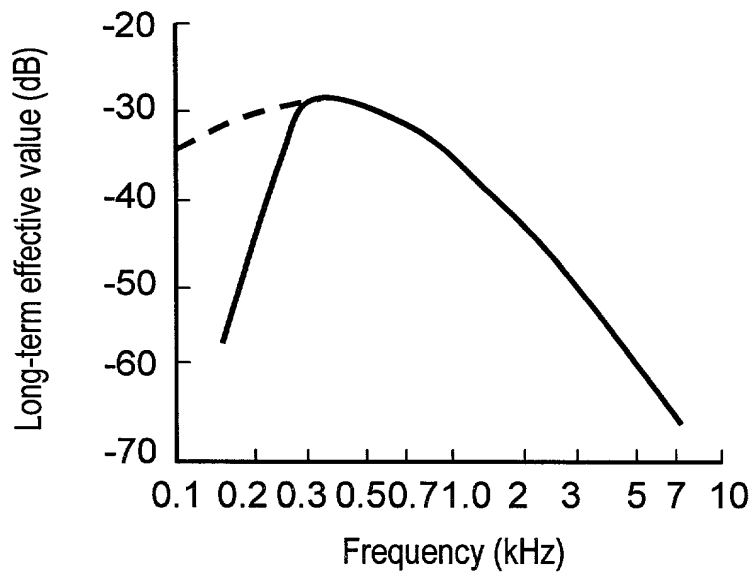


FIG. 11

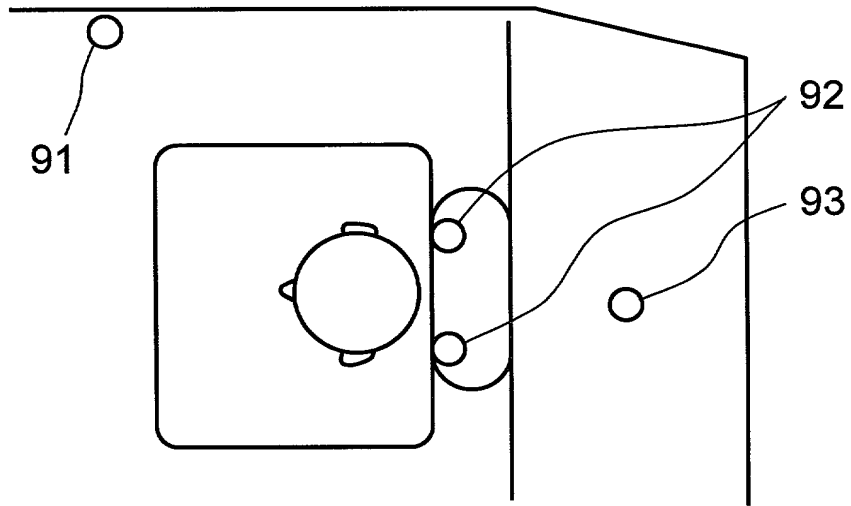


FIG. 12


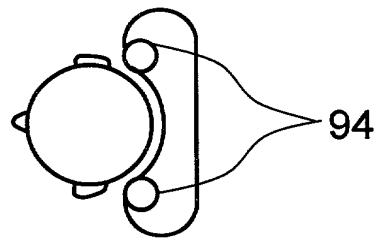




FIG. 13

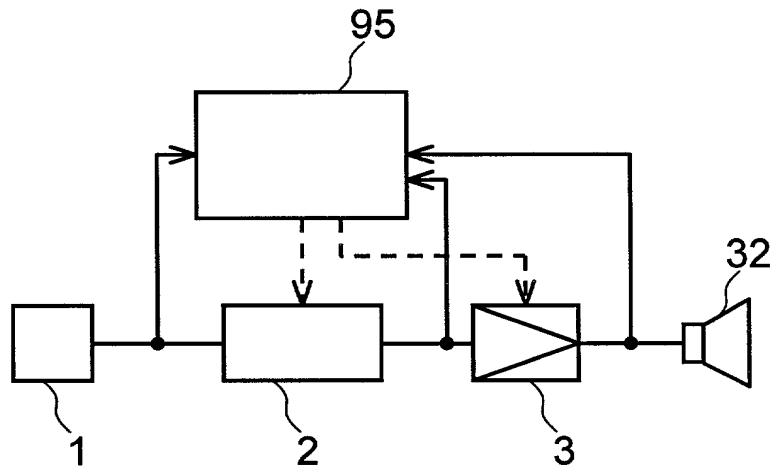

## Reference numerals in the drawings

- 1 Source unit
- 2 ANC unit
- 3 Amplifier
- 4 Reproducing transducer
- 5 Vehicle interior voice discriminating unit
- 6 Sensor
- 7 Filter
- 8 Adaptive algorithm unit
- 31 Reference microphone
- 32 Speaker
- 33 Error microphone
- 34 Echo-canceling filter
- 35 Delay unit
- 38 Filter
- 41 Filter
- 42 Filter
- 43 Adaptive filter
- 44 Adaptive filter
- 45 Switching unit
- 46 Mixer
- 61 Seat microphone
- 62 Noise reference signal sensor
- 63 Voice band filter
- 64 Voice band filter
- 65 Voice-location estimating unit
- 66 Voice-likelihood estimating unit

- 67 Noise correlating unit
- 68 Time-difference information unit
- 69 Passenger-location information unit
- 70 Spectrum characteristics unit
- 71 Envelope characteristics unit
- 72 Weighting unit
- 73 Determining unit
- 74 Engine sound sensor
- 75 Engine speed sensor
- 76 Outside sound sensor
- 77 Interior sound sensors
- 78 Passenger-detecting sensors
- 79 Road surface sound sensor
- 81 Front seat right microphone
- 82 Front seat left microphone
- 83 Back seat right microphone
- 84 Back seat left microphone
- 85 Center position
- 91 Door speaker
- 92 Headrest speakers
- 93 Rear tray speaker
- 94 Bone-conduction actuators
- 95 Fail-safe unit

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ACTIVE NOISE CONTROL SYSTEM,

the specification of which is attached hereto unless the following box is checked:

☒ was filed on August 17, 2000 as  
United States Application Number or PCT International Application Number PCT/JP00/05490  
and was amended on April 17, 2001 (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Not Claimed

<u>11-233819</u>	<u>Japan</u>	<u>20 August 1999</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____	_____
(Application Number)	(Filing Date)

_____	_____
(Application Number)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Paul F. Prestia	Reg. No. <u>23,031</u>	Lawrence E. Ashery	Reg. No. <u>34,515</u>	Jack J. Jankovitz	Reg. No. <u>42,690</u>
Allan Ratner	Reg. No. <u>19,717</u>	Christopher R. Lewis	Reg. No. <u>36,201</u>	Jonathan H. Spadt	Reg. No. <u>45,122</u>
Andrew L. Ney	Reg. No. <u>20,399</u>	Robert L. Andersen	Reg. No. <u>25,771</u>	Christopher I. Halliday	Reg. No. <u>42,621</u>
Kenneth N. Nigon	Reg. No. <u>31,549</u>	Joshua L. Cohen	Reg. No. <u>38,040</u>	Scott A. Mckeown	Reg. No. <u>42,866</u>
Kevin R. Casey	Reg. No. <u>32,117</u>	Daniel N. Calder	Reg. No. <u>27,424</u>		
Benjamin E. Leace	Reg. No. <u>33,412</u>	Louis W. Beardell, Jr.	Reg. No. <u>40,506</u>		
James C. Simmons	Reg. No. <u>24,842</u>	Jacques L. Etkowicz	Reg. No. <u>41,738</u>		

Address all correspondence to: Lawrence E. Ashery

Ratner & Prestia, Suite 301, One Westlakes, Berwyn, P.O. Box 980, Valley Forge, PA 19482-0980

Address all telephone calls to: Lawrence E. Ashery at (610) 407-0700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Toshihiko Ohashi

Inventor's signature 1-00 Toshihiko Ohashi

Date May 21, 2001

Residence Osaka, Japan

Citizenship Japanese

Post Office Address 2-8-24, Machikuzuha, Hirakata-shi,

Osaka, 573-1106 Japan

Full name of second joint inventor, if any (given name, family name) \_\_\_\_\_

Second Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

☐ Additional inventors are being named on separately numbered sheets attached hereto.